




LEDLITE MICROLED Series

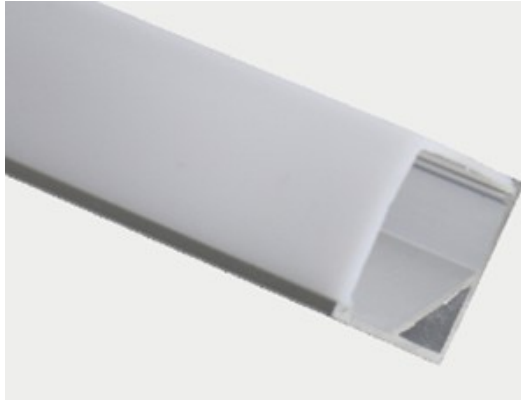

Chromatic Temp.

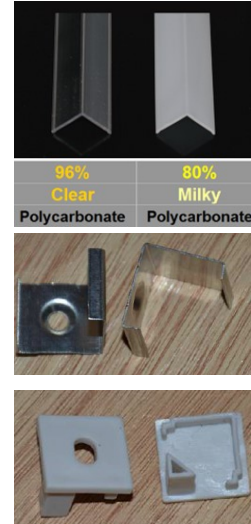

Dimensions

MICROLED SC16

4000K, 3000k, other

16mmx16mm x 2000mm

FEATURES

High power aluminum LED profile Corner in max. 2mtrs lengths segments

- PMMA Milky or Clear diffuser
- suitable for FLEXILED strips range
Compatible with single row 3528, 5630 & 3535, 5050 LED strip NANO, IP67, IP44
- c/w end caps and mounting brackets
- Natural Anodised finish

OPTIONS

- LED strip light source - 5W/m, 10W/m, 15W/m, 17W/m 24V CV
(with over 100lm/W efficacy)
- 3000K, 4000K, 5000K (Ra>80) , RGB
- dimming (DALI, PWM)
- white or other colour finishes