



**LEDLITE MICROLED Series**

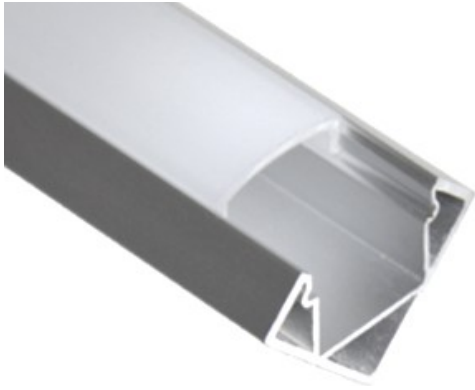

**Chromatic Temp.**

**Dimensions**

**MICROLED T19**

4000K, 3000k, other

18.5mmx18.5mm x 2000mm

**FEATURES**

High power aluminum LED profile in 2mtrs lengths segments

- PMMA Frosted diffuser
- suitable for FLEXILED strips range  
Compatible with single row 3528, 5630 & 3535, 5050 LED strip NANO, IP67, IP44
- c/w end caps and mounting brackets
- Natural Anodised finish

**OPTIONS**

- LED strip light source - 5W/m, 10W/m, 15W/m, 24V CV ( over 100lm/W efficacy )  
- 3000K, 4000K, 5000K ( Ra>80)
- dimming ( DALI, PWM )
- white or other colour finishes