
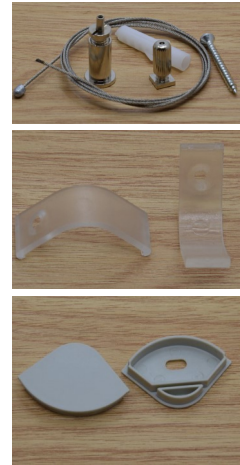


LEDLITE MICROLED Series

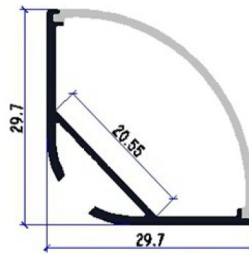

Chromatic Temp.

Dimensions

MICROLED TC30

4000K, 3000k, other

29.7mmx29.7mm x 2000mm

FEATURES

High power aluminum LED profile Large Corner or Pendant in max. 2mtrs lengths segments

- PMMA Milky or Clear diffuser
- suitable for FLEXILED strips range
Compatible with single or double row, 3528, 5050, 5630 & 3020 LED strip
- c/w end caps and mounting brackets
- Natural Anodised finish



OPTIONS

- LED strip light source - 5W/m, 10W/m, 15W/m, 20W/m 24V CV
(with over 100lm/W efficacy)
- 3000K, 4000K, 5000K (Ra>80) , RGB
- dimming (DALI, PWM)
- white or other colour finishes

